



Solar Flyhorse Light


RS-FH100

RS-FH120

RS-FH150




CE FC

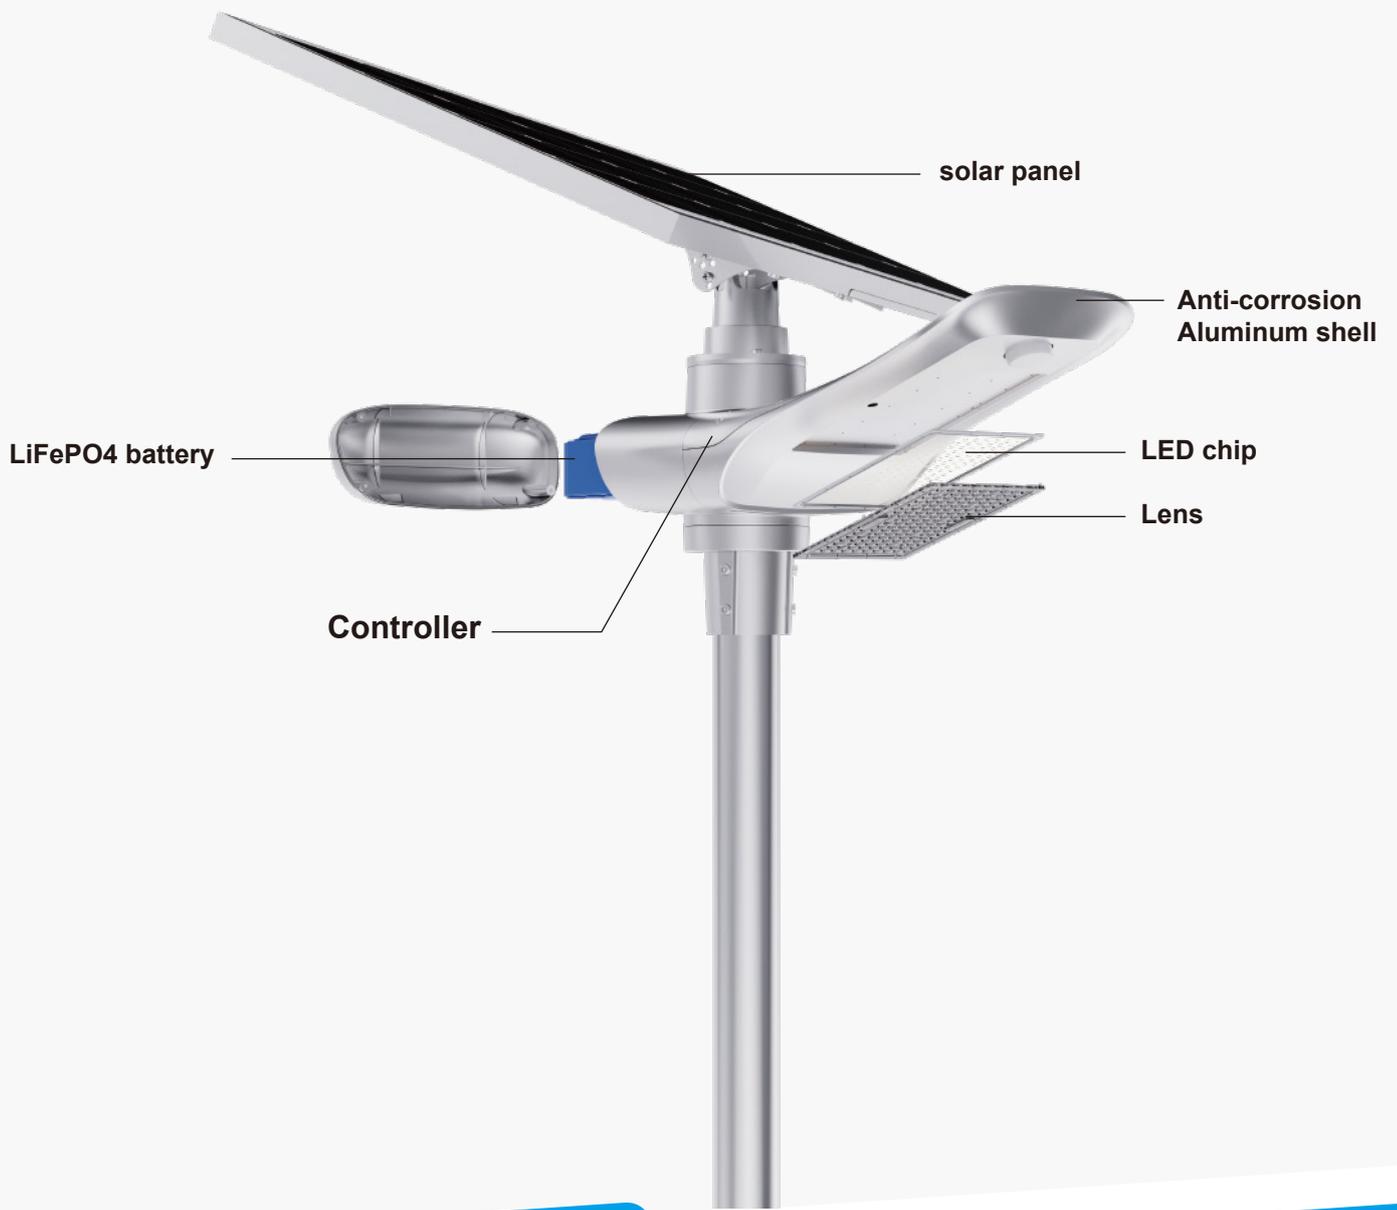

Unique Structure Design




Lamp post installation height recommendation diagram

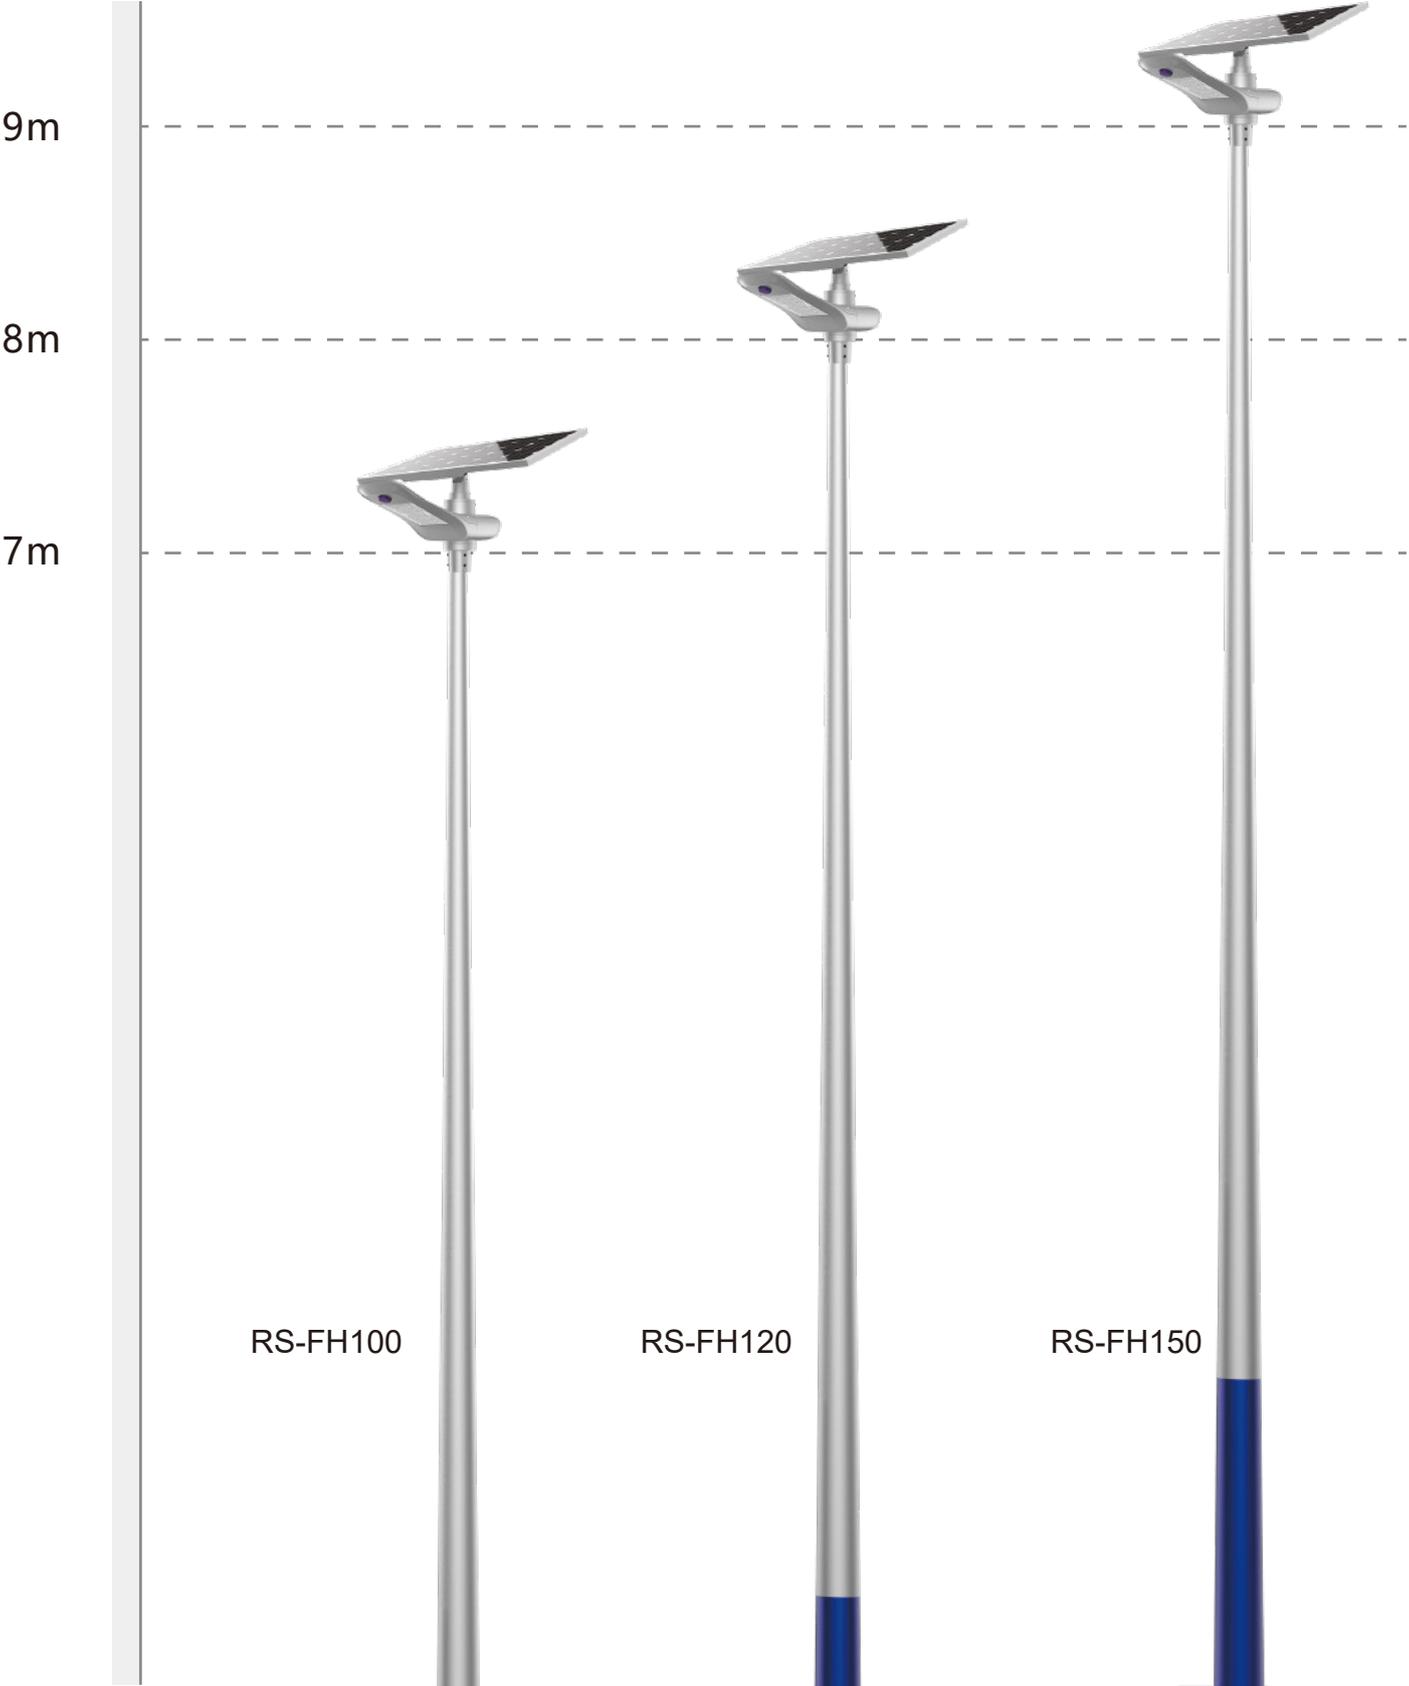


Unique Structure Design

Solar panel looks like an umbrella to protect battery from high temperature and extend the lifetime. Perfectly solve heat dissipation.

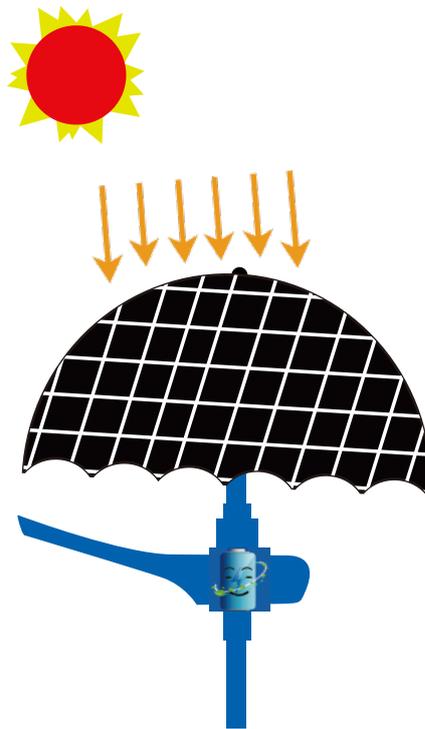

Solar panel can be adjustable manually in vertical and horizontal direction, ensure the maximum efficiency of solar energy.

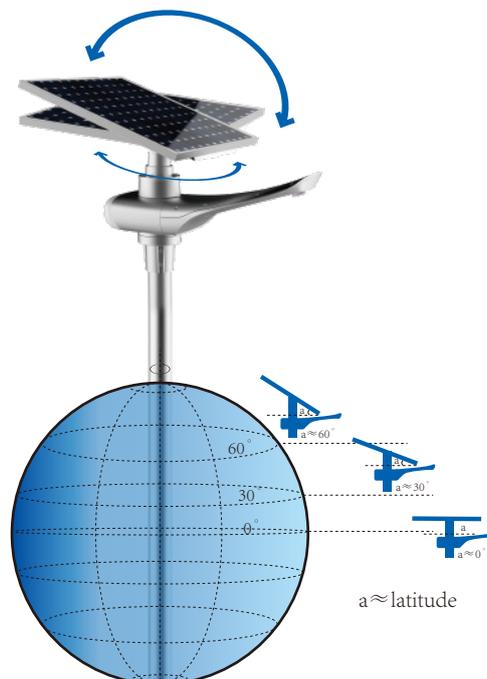

Core Technologies



Unique Integration Design

Easy to transport, install and maintain



High Efficiency LED Chips

Using high efficiency 140pcs of 5050 LED chips, optimized brightness, single lumen value >190lm/w, with the aluminum chip base makes excellent heat dissipation.



Multi-Peak MPPT

Road Smart new patent solar controller adopts multi-peak MPPT technology, which can timely track the maximum power point and improve the conversion efficiency of solar panels.



MPPT Technology

MPPT is an advanced charge mode whose full name is Maximum Power Point Tracking function which can increase the energy utilization rate by 15% to 20% than the PWM controller.



ITC Technology (Intelligent Temperature Control)

Automatically Switch off function by software at temperature limit to protect battery from long time high temperature working. Heating up function to protect battery at Low temperature atmosphere. Extend longer lifetime of the whole system.



IPC 5.0 Technology

Through 10years' experience, Road Smart upgraded highly precise 5.0 version IPC technology (intelligent power control 5.0). It will intelligently detect recent weather conditions, reasonably plan the discharge power to achieve more rainy days.



ICD Technology (Intelligent Charge and Discharge)

Using Grade A LiFePO4 battery with excellent safety performance. Road Smart's unique current equalization and dual protection (software and hardware) enable the battery's capacity remains at 90% after 2000 cycles. Lifetime is 4 times longer than that of lead-acid batteries.




Patent Bat-wing Lens

Lighting area much wider, the maximum of using the lighting all light the road, increase the installation distance to 50m.

Remote Control

Indicator light status instructions

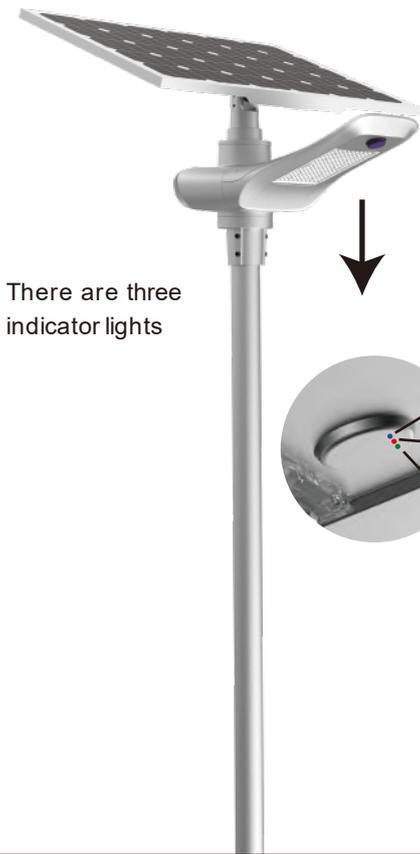


There are three indicator lights

LED light	Indications	Status	Functions
● Blue 	Charging indication	Long-term On	Be charging
		Long-term Off	Battery full charged
● RED 	Battery indication	Long-term On	Battery works normally
		Long-term Off	Battery is not connected/No power
		Fast twinkling	Battery is over discharged
		Slow twinkling	Battery full charged
● Green 	Load indication	Long-term On	Load is on
		Long-term Off	Load is off

System faults include:

1. Over discharging of battery.
2. System overvoltage.
3. LED load in short circuit.
4. LED load in open circuit.

6 working modes

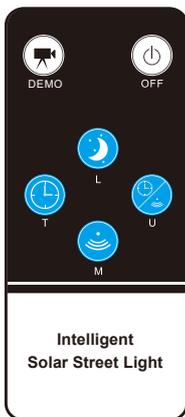


-  **DEMO:** No matter day or night, light "on" for 1 minute. Only for test use.
-  **OFF:** Light "off", no matter day or night.
-  **L:** At night, 100%-2hr, 70%-2hrs, 30%-dawn.
-  **T:** At night, 100%-1hr, 70%-2hrs, 40%-3hrs.
-  **M:** At night, 50%-1hr, 100%-3hrs, 30%-dawn.
-  **U:** At night, 100%-1hr, 70%-3hrs, then sensor working, 50% if people come, 20% stand-by.

Note: Default is L mode, once a certain mode was set successfully, it will be reserved until you change other modes with remote control.


Light Distribution

Luminous intensity distribution curves

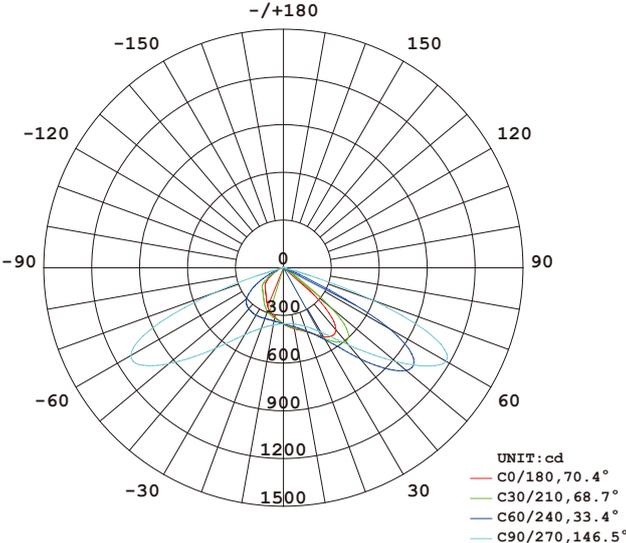


Beam Angle: X-axis: 158° Y-axis: 62°

Bat wing lens with polarized light

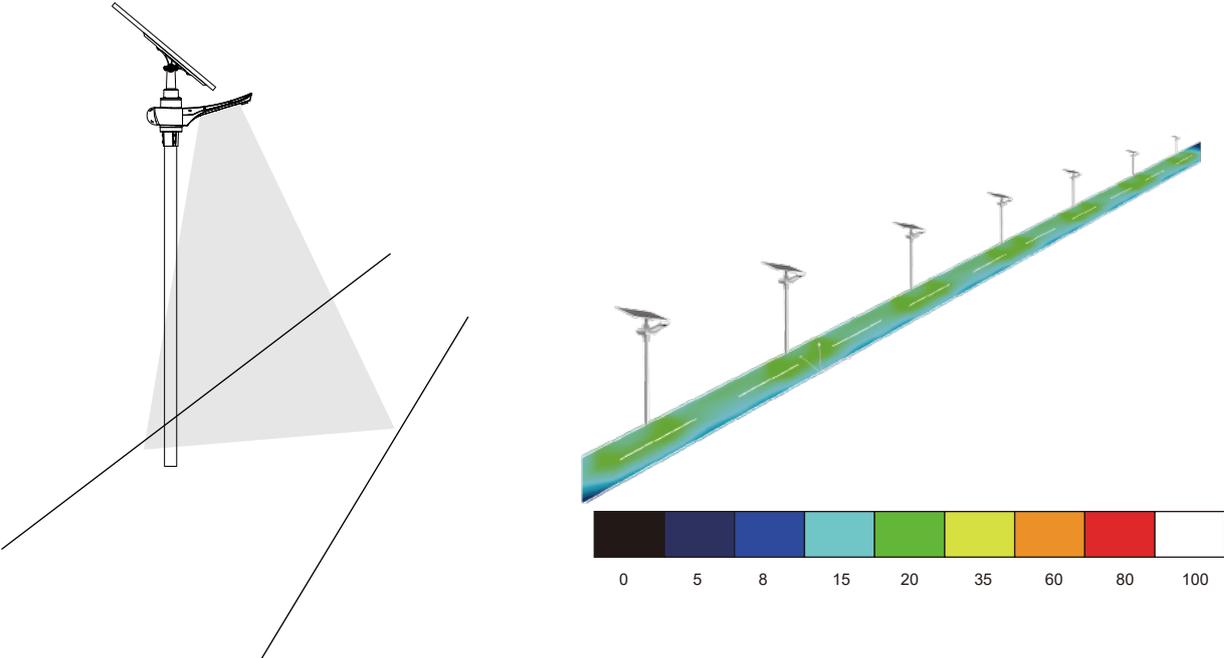


Dimension

Lamp holder

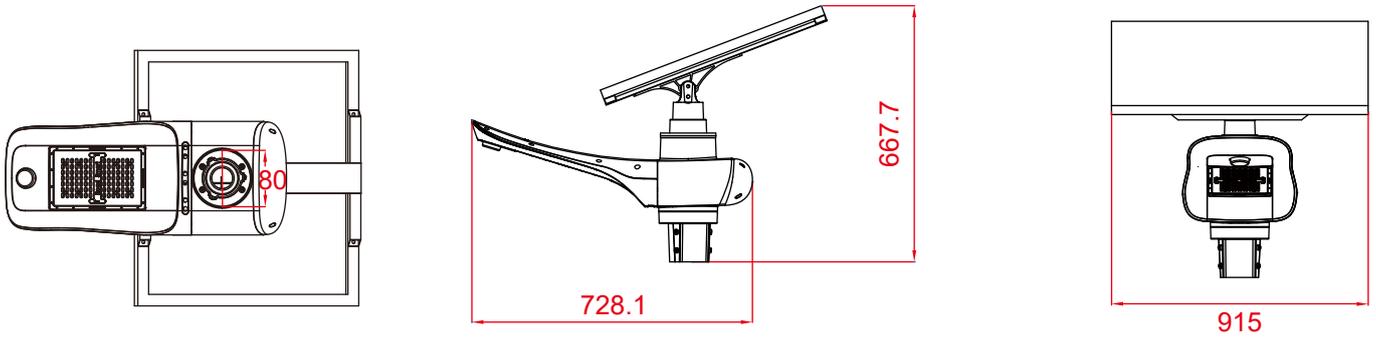


Solar panels

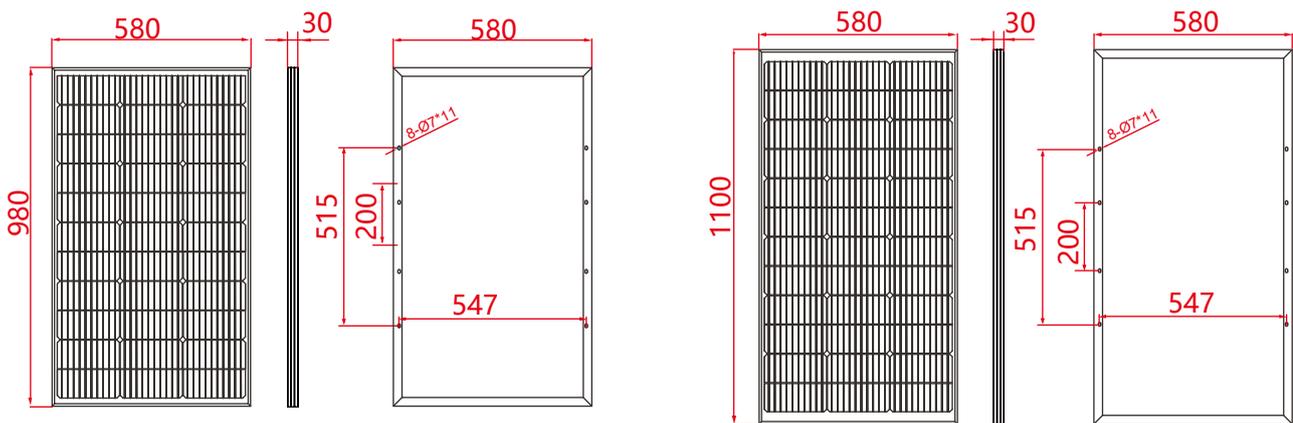

100W

120W

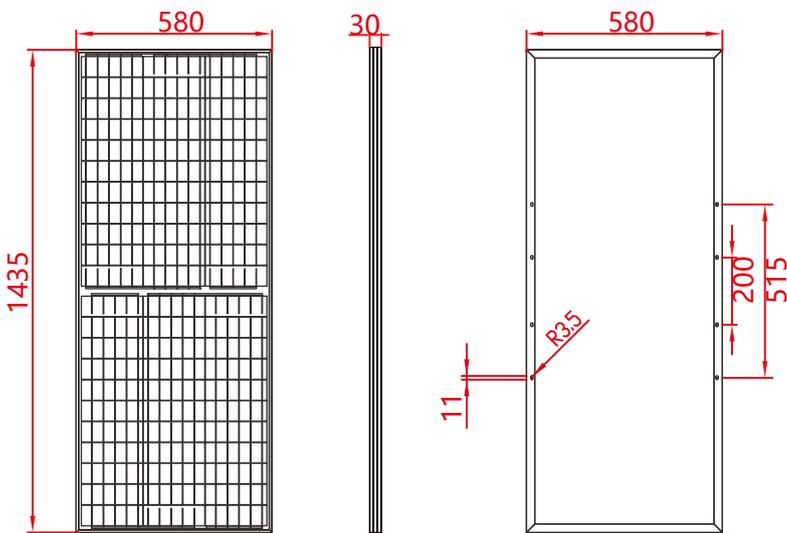

150W

Parameter

Technical parameter

	Type	RS-FH100	RS-FH120	RS-FH150
Panel	Power	100W/18V	120W/18V	150W/18V
	Material	Mono crystalline silicon	Mono crystalline silicon	Mono crystalline silicon
	Solar cell efficiency	19-20%	19-20%	19-20%
Lithium battery	Capacity	380WH	460WH	610WH
	Charge cycle times	2000 times	2000 times	2000 times
Lamp head	Luminous flux	5800-6100lm	7500-7700m	9100-9300lm
	Light output	30W	40W	50W
	LED qty	150pcs		
	LED chip	Bridgelux		
	Color temperature	3000-6000K		
	CRI	≥70Ra		
	Material of lamp head	Aluminum alloy		
	Elevation angle	17° (attention to Dialux use)		
	Lifespan	50000hrs		
	System	Light control voltage	5V	
Light distribution		Batwing lens with polarized light		
Beam angle		X-axis: 155° Y-axis: 50°		
Lighting time(full charged)		5-7 rainy days		
Operation temperature		-20°C~60°C		
Installation	Top diameter of pole	76mm		
	Mounting height	7-8m	7-8m	8-10m
	Installation spacing	20-40m		

Application



Highway



Pathway



Village road



School



Parking lots



Factory



Resort

